

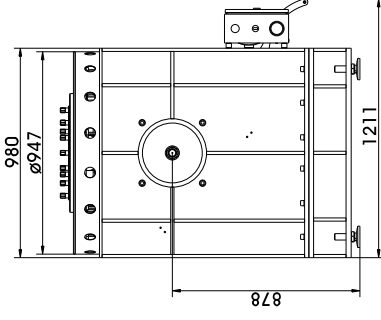


### TECHNICAL PARAMETERS Vibration exciter S 59360/AIT-440

Rated peak force $Sine_{pk}/Random_{RMS}/Shock_{pk}$ <sup>1</sup>	60000/60000/1 800000 N
Frequency range	5 - 2400 Hz
Main resonance frequency	2100 Hz
Max. displacement Peak-Peak <sup>2</sup>	50.8 mm
Max. velocity Sine/Random/Shock	2.0/2.0/3.0 m/s
Max. acceleration Sine/Random/Shock <sup>1</sup>	100/90/250 g
Suspension stiffness	175 N/mm
Effective moving mass	58 kg
Max. weight tested	910 kg
Weight	4500 kg
Magnetic stray field	1.5 mT
Armature diameter	440 mm
Required compressed air supply	Min. 600 kPa
Interlocks	Temperature, displacement, water flow rate, differential pressure, overcurrent, compressed air, conductance

<sup>1)</sup> theoretical maximum shock value. Depends on payload, amplifier, shock and shock width  
<sup>2)</sup> optionally displacement of 76.2 mm (3 inch); impact by moving to static mass and frequency is possible

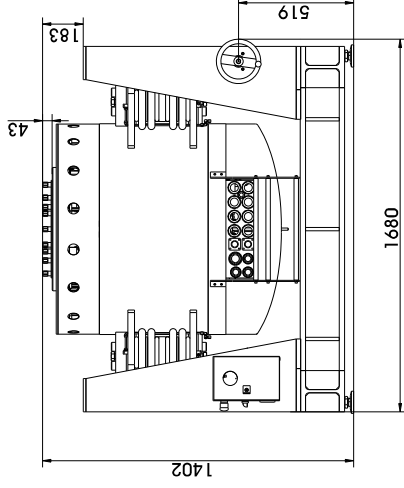

### SCOPE OF DELIVERY, OPTIONS AND FEATURES OF THE SYSTEM

<b>Scope of delivery:</b> Vibration exciter 60 kN Trunnion mount with integrated vibration isolation (AIT) Power amplifier 158 kVA Cooling unit with integrated hydraulic unit Connection cables (each 10 m) Power cables (each 10 m) for amplifier (Direct connection) Water hoses with self-sealing couplings (each 10 m) Hydraulic hoses with self-sealing couplings (each 10 m) Compressed-air hose NW 7.2 (Standard) (10 m)	<b>Options:</b> 3 inch (76.2 mm) displacement Different hole pattern of armature (different pitch diameter and/or thread inserts) at customers request Thermobarrier (-40°C to +140°C) Chamber leadthrough Climatic chamber support kit Remote control (Software) Cable/Hose extension Factory acceptance test	<b>Features:</b> Vibration isolation < 3 Hz (AIT) Fully automatic pneumatic load compensation Frictionless hydrostatic bearing (Dual Bearing) AIT fixable Automatic centering of the AIT-System and the armature Degauss kit to reduce stray magnetic field Shaker-water circuit with overpressure Automatic permanent monitoring of conductance Integrated mains switch and line filter Noise-button Energy-saving-mode Input voltage analyzer Voltage clipping limiter to avoid clipping 3 Sigma peak current Made in Germany Servicehotline (Monday-Friday)
----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Armature 440 (Standard)

## TECHNICAL PARAMETERS Power Amplifier A 5 40 3 158

Output power<sub>RMS</sub> 158000 VA  
 Frequency range DC - 4 kHz  
 Voltage<sub>RMS</sub> max. 150 V  
 Current<sub>RMS</sub> max. 1050 A  
 Load resistance, opt. 2.5/5/10 V  
 signal input voltage<sub>RMS</sub> (switchable)  
 Distortion < 0.7 %  
 Signal to noise ratio > 90 dB  
 Field voltage, max. 155 V  
 Field current, max. 260 A  
 Weight 2200 kg  
 Dimensions (WxHxD) 2840 x 2320 x 1050 mm  
 Power supply (Standard) 3~ / N / PE 400 V ± 5% 50 Hz  
 Recommended fuse protection (Standard) 200 A slow  
 Max. power consumption at 400 V (incl. cooling unit) 100 kVA

Interlocks: Overload, temperature, clipping and more

Features:  
 High Signal to noise ratio of > 90 dB  
 Mains switch  
 Lo-Field/Hi-Field button (Energy-saving mode)  
 Integrated field supply  
 Integrated line filter  
 ESD-monitoring (Protection of the system against damage)  
 Noise-button  
 Input voltage analyzer  
 Voltage clipping limiter to avoid clipping  
 3 Sigma peak current  
 Field voltage/field current variable according to customer spec.



## TECHNICAL PARAMETERS Cooling unit C 59410

Environmental conditions:  
 Temperature 5 - 30 °C  
 Relative humidity 10 - 80 %  
 Energy transfer max. 3 kW

Process water:  
 Temperature 5 - 15 °C  
 Volume flow at max. supply temperature 10 m³/h  
 Working pressure: supply - static ≤ 8 bar (≤ 800 kPa)  
 Working pressure: dynamic differential pressure ≥ 3 bar (≥ 300 kPa)  
 Dissipated heat flow max. 110 kW  
 Nominal width of supply pipes R 1 1/4 IT (32 mm)  
 pH value 7 ± 1  
 Dimensions of dirt particles < 25 µm  
 Water hardness (total/carbonate) < 8 °dH / < 5 °dH  
 Weight 550 kg  
 Dimensions (WxHxD) 600 x 2140 x 970 mm

Features:  
 Closed system → No pollution and no water loss by evaporation  
 The system works with a higher pressure → No cavitation interferences at the measuring signal  
 Manometers and flow meters at several places within the circuits  
 Integrated conductance monitoring and demineralisation  
 Fine filter with pollution monitoring  
 Reduction of water consumption at part load by controlling of the process water flow  
 Self-sealing couplings (free from leakage)  
 Optional: Hose length according to customer specs (up to 20 m)  
 Optional: Monitoring of all data, warnings and error messages at the PC

